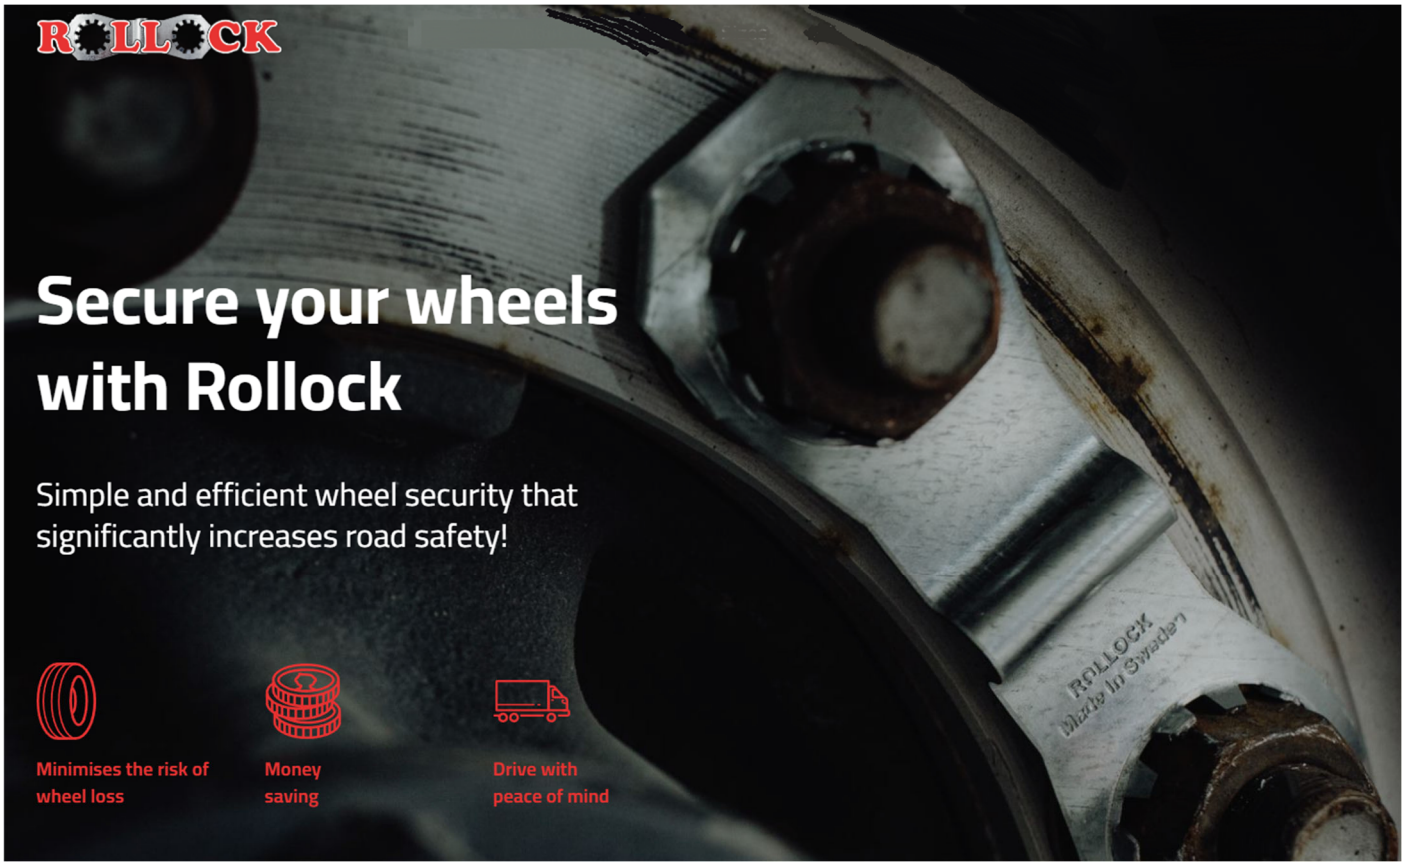



**Cos'è Rollock?**

Molti proprietari di autocarri faticano a trovare una soluzione per mantenere saldi i dadi delle ruote dei loro veicoli pesanti. I dadi allentati non solo possono causare il distacco della ruota, ma comportano anche costi elevati e, in alcuni casi, gravi incidenti.Con le clip di bloccaggio Rollock, il problema è risolto.

**Come funziona Rollock?**

Ogni clip blocca due dadi ed è molto semplice da installare. Tutto ciò che serve è il nostro pratico utensile e un martello con testa in plastica. Basta inserire la clip di bloccaggio su due dadi adiacenti: i denti si adattano perfettamente ai sei lati dei dadi e il gioco è fatto! I dadi rimarranno saldamente in posizione e bloccati in sicurezza, riducendo al minimo il rischio di perdita della ruota. L'ingegnoso sistema Rollock non lascia segni ed è facile da rimuovere: basta svitare il dado della ruota come di consueto e la clip si staccherà facilmente.

**Perché scegliere Rollock?**

Qual è il costo del distacco di una ruota?
Danni a cerchio, dadi, bulloni e mozzo
Pneumatico danneggiato
Danni ad altre parti del telaio
Perdita di tempo e interruzioni (guasto)
Ore di lavoro straordinario
I costi possono facilmente raggiungere migliaia di euro! Nella peggiore delle ipotesi, un incidente causato dal distacco della ruota può provocare gravi lesioni o peggio ancora

**What is Rollock?**

Many truck owners struggle to find a solution to keep the wheel nuts on their heavy vehicles secure. Loose nuts can not only cause a wheel to detach but also lead to high costs and, in some cases, serious accidents.

Rollock locking clips solve this problem.

**How does Rollock work?**

Each clip locks two nuts together and is very easy to install. All you need is our handy tool and a plastic-headed hammer. Simply fit the locking clip over two adjacent nuts—the teeth fit perfectly around the six sides of the nuts, and that's it!

The nuts remain firmly in place and securely locked, minimizing the risk of wheel detachment.

The ingenious Rollock system leaves no marks and is easy to remove: simply unscrew the wheel nut as usual, and the clip comes off easily.

**Why choose Rollock?**

What is the cost of a detached wheel?

Damage to the rim, nuts, bolts, and hub

Damaged tire

Damage to other chassis components

Lost time and downtime (breakdown)

Overtime labor costs

Costs can easily run into the thousands of euros! In a worst-case scenario, an accident caused by a detached wheel can result in serious injury or even death.

ROLLOCK



NISO TECH AB
KEEPING YOU ON THE ROAD

# ROLLOCK

FRA.it
AUTOMOTIVE COMPONENTS



Rollock clamp 104cc, 30-33

Artnr: 40200

**2701270**



Rollock clamp 70cc, 30-33

Artnr: 40201



Rollock clamp 88cc, 30-33

Artnr: 40202



Rollock clamp 104cc, 24-27

Artnr: 40203

**2701273**



Rollock clamp 104cc, 32-36

Artnr: 40206



Rollock clamp 122cc, 24-27

Artnr: 40210



Rollock clamp 104cc, 19-21

Artnr: 40211

**2701275**

Artnr: 40212

NEW



Rollock clamp 65cc, 19-21

Artnr: 40213



Rollock startkit 30-33 Complete

Artnr: 40240



Rollock start kit 19-21 w/o removal tool

Artnr: 40243



Rollock Tool 104cc 30-33

Artnr: 49110

**2701271**

NEW



Rollock Tool 65CC 19-21

Artnr: 491101



Rollock Tool 104cc 30-33 for cap nuts

Artnr: 49110S



Rollock Tool 70cc 30-33

Artnr: 49111



Rollock Tool 104cc 24-27

Artnr: 49112



Rollock Tool 88CC 30-33

Artnr: 49113



Rollock Tool 104cc 30-33, short

Artnr: 49115



Rollock Tool 104cc 19-21

Artnr: 49116

**2701274**



Rollock Tool 104cc 32-36

Artnr: 49118



Rollock Tool 122cc 24-27

Artnr: 49119



Removal tool, Rollock

Artnr: 49121

**2701272**



Deadblow hammer 1,67 kg

Artnr: 49122

| Rim | No. studs x bolt circle dia. | Nut Size | Rollock clamp |
|---|---|---|---|
| 16" | 6 x 130mm | 19-21mm | 65 cc 19-21 |
| 16" | 6 x 205mm | 19-21mm | 104 cc 19-21 |
| 17.5" | 6 x 205mm | 24-27mm | 104 cc 24-27 |
| 17.5" | 6 x 245mm | 24-27mm | 122 cc 24-27 |
| 17.5"/19.5" | 10 x 225mm | 30-33mm | 70 cc 30-33 |
| 19.5" | 8 x 275mm | 30-33mm | 104 cc 30-33 |
| 22.5" | 10 x 335mm | 30-33mm | 104 cc 30-33 |
| 22.5" | 10 x 335mm | 32-36mm | 104 cc 32-36 |
| 17.5" | 10 x 8.75" | 30-33mm | 70 cc 30-33 |
| 22.5"/24.5" | 10 x 11.25" | 30-33mm | 88 cc 30-33 |

